




FULL HEIGHT TURNSTILES SC-342-D



Body	: 60x40x2mm profile frame, 1.5 mm sheet steel. (Electrostatic powder coated or 304 stainless steel)
Coupling	: Aluminum casting, precision CNC machining.
Mechanism	: 10 mm laser cut steel sheet, precision CNC machining, stainless steel impeller. 4 lever mechanism.
Arms	: 38x1.5 mm electrostatic powder painted or stainless steel, welded to the middle rotor, 10 rows of arms.
Dimensions	: 1900x1270x2200 mm, Arm 550 mm, Transition range 480mm ~340 kg
Indicators	: Both directions on top panel.
Energy and Power	: 176-264 V AC 50-60 Hz / 24V DC Max: 50 W
Temperature	: -20 / +60 °C
Working Mode	: Two-way locked, one-way locked, one-way free, both directions free, adjustable trigger time.
Features	: Single contact, two-way switching, memory mode, service port, internal operation and transition counters.
Outputs	: Dry contact pass information separately for both directions, PC control port.
Emergency	: Free mode with emergency input, free mode when there is no power.
Safety Status	: With the safety status input, the turnstile goes into locked mode and never opens.
Capacity	: 40 people / minute
Option	: RF control card, counter, button, coin unit, reader unit, heater.

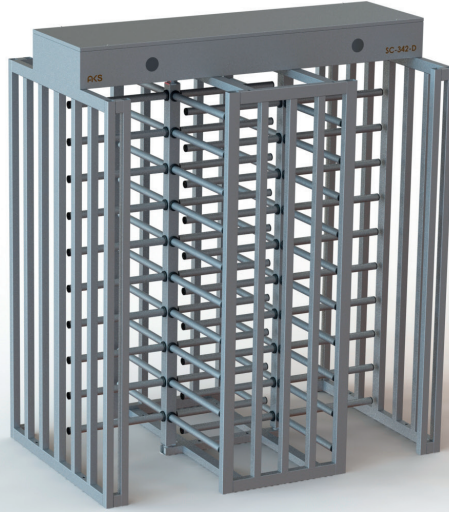